


Symmetric IRB

AOS-CX EVPN/VXLAN Symmetric IRB

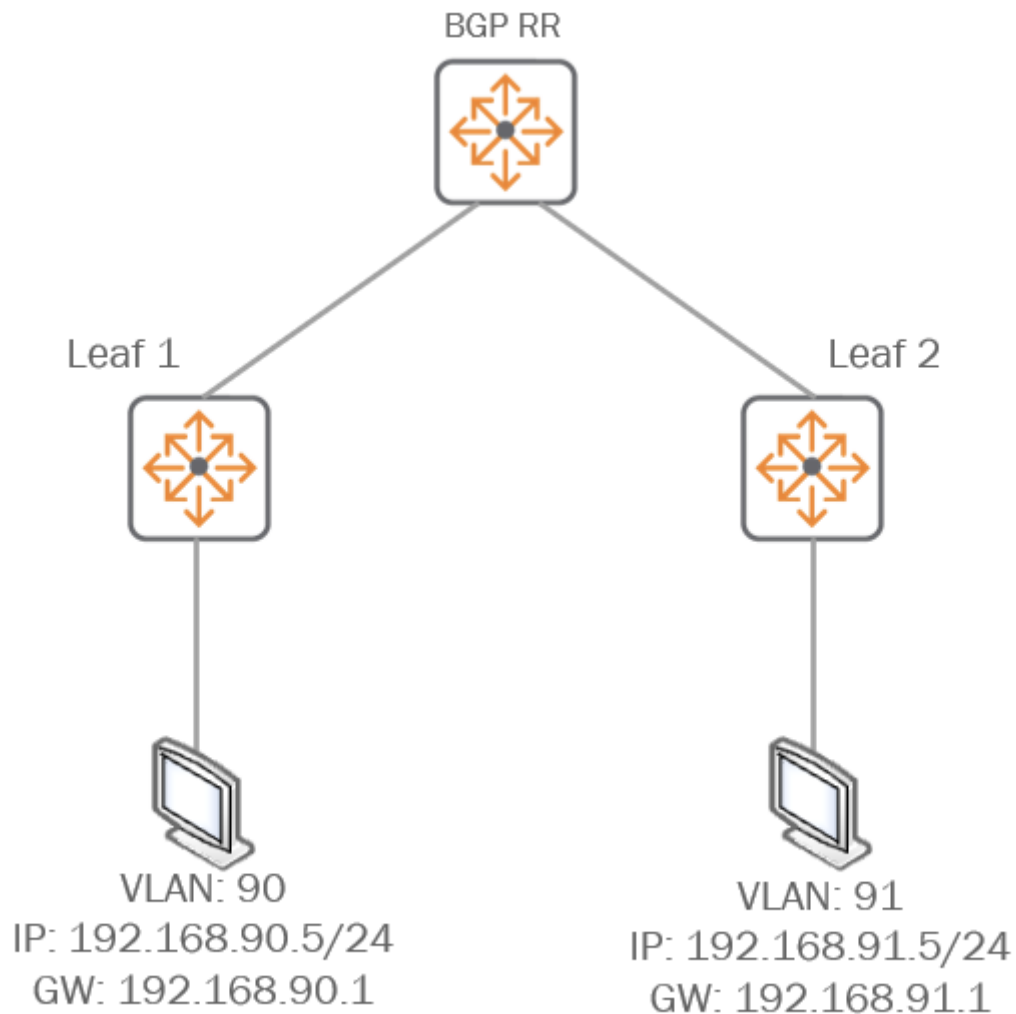

Configuration for Route Reflector

```
bfd
!
vlan 1280
    name data-1280
vlan 4020
    name vxlan-connect
evpn
    vlan 1280
        rd auto
        route-target export auto
        route-target import auto
interface 1/1/23
    no shutdown
    mtu 9198
    no routing
    vlan access 4020
interface 1/1/24
    no shutdown
    mtu 9198
    no routing
    vlan access 4020
interface loopback 1
    ip address 10.255.1.1/32
    ip ospf 1 area 0.0.0.0
interface vlan 4020
    ip mtu 9198
    ip address 172.16.1.10/24
    ip ospf 1 area 0.0.0.0
    no ip ospf passive
interface vxlan 1
    source ip 10.255.1.1
    no shutdown
    vni 1001280
    vlan 1280
router ospf 1
    router-id 10.255.1.1
    passive-interface default
    bfd all-interfaces
    redistribute connected
    area 0.0.0.0
router bgp 65001
    bgp router-id 10.255.1.1
    neighbor mcast-mdf peer-group
    neighbor mcast-mdf remote-as 65001
```

```
neighbor mcast-mdf update-source loopback 1
neighbor 10.255.1.2 peer-group mcast-mdf
neighbor 10.255.1.3 peer-group mcast-mdf
address-family l2vpn evpn
    neighbor mcast-mdf send-community both
    neighbor 10.255.1.2 route-reflector-client
    neighbor 10.255.1.2 activate
    neighbor 10.255.1.3 route-reflector-client
    neighbor 10.255.1.3 activate
exit-address-family
!
```

Configuration for leaf 1 switch VLAN 90

```
“ bfd
vrf Data
    rd 65001:100
    route-target export 65001:100 evpn
    route-target import 65001:100 evpn
vlan 90
    name v90
vlan 1280
    name Data-1280
vlan 4020
    name vxlan-connect
virtual-mac 00:00:02:00:03:00
evpn
    vlan 90
        rd auto
        route-target export auto
        route-target import auto
        redistribute host-route
    vlan 1280
        rd auto
        route-target export auto
        route-target import auto
interface 1/1/11
```

```
no shutdown
no routing
vlan access 90
interface 1/1/24
no shutdown
no routing
mtu 9198
vlan access 4020
interface loopback 1
ip address 10.255.1.3/32
ip ospf 1 area 0.0.0.0
interface vlan 90
vrf attach Data
ip address 192.168.90.1/24
active-gateway ip mac 00:00:02:00:00:03
active-gateway ip 192.168.90.1
interface vlan 1280
ip address 10.128.0.251/24
interface vlan 4020
ip mtu 9198
ip address 172.16.1.30/24
ip ospf 1 area 0.0.0.0
interface vxlan 1
source ip 10.255.1.3
no shutdown
vni 1000090
vlan 90
vni 1001280
vlan 1280
vni 2000100
vrf Data
routing
!
router ospf 1
router-id 10.255.1.3
bfd all-interfaces
area 0.0.0.0
router bgp 65001
bgp router-id 10.255.1.3
neighbor mcast-core peer-group
neighbor mcast-core remote-as 65001
neighbor mcast-core update-source loopback 1
neighbor 10.255.1.1 peer-group mcast-core
neighbor 10.255.1.2 peer-group mcast-core
```

```

address-family l2vpn evpn
  neighbor mcast-core send-community both
  neighbor 10.255.1.1 activate
exit-address-family
!
vrf Data
  address-family ipv4 unicast
    redistribute connected
  exit-address-family
!

```

Configuration for leaf 2 switch VLAN 91

```

“ bfd
vrf Data
  rd 65001:100
  route-target export 65001:100 evpn
  route-target import 65001:100 evpn
vlan 91
  name v91
vlan 1280
  name data-1280
vlan 4020
  name vxlan-connect
virtual-mac 00:00:02:00:02:00
evpn
  vlan 91
    rd auto
    route-target export auto
    route-target import auto
    redistribute host-route
  vlan 1280
    rd auto
    route-target export auto
    route-target import auto
interface 1/1/11
  no shutdown
  no routing
  vlan access 91
interface 1/1/48
  no shutdown

```

```
mtu 9198
no routing
vlan access 4020
interface loopback 1
  ip address 10.255.1.2/32
  ip ospf 1 area 0.0.0.0
interface vlan 91
  vrf attach Data
  ip address 192.168.91.1/24
  active-gateway ip mac 00:00:02:00:00:02
  active-gateway ip 192.168.91.1
interface vlan 4020
  ip mtu 9198
  ip address 172.16.1.20/24
  ip ospf 1 area 0.0.0.0
  no ip ospf passive
interface vxlan 1
  source ip 10.255.1.2
  no shutdown
  vni 1000091
    vlan 91
  vni 1001280
    vlan 1280
  vni 2000100
    vrf Data
    routing
!
router ospf 1
  router-id 10.255.1.2
  passive-interface default
  bfd all-interfaces
  redistribute connected
  area 0.0.0.0
router bgp 65001
  bgp router-id 10.255.1.2
  neighbor mcast-core peer-group
  neighbor mcast-core remote-as 65001
  neighbor mcast-core update-source loopback 1
  neighbor 10.255.1.1 peer-group mcast-core
  neighbor 10.255.1.3 peer-group mcast-core
  address-family l2vpn evpn
    neighbor mcast-core send-community both
    neighbor 10.255.1.1 activate
  exit-address-family
```

```
!  
vrf Data  
  address-family ipv4 unicast  
    redistribute connected  
  exit-address-family  
!
```

Revision #3

Created 2 June 2025 18:04:49 by Tyler

Updated 2 June 2025 21:15:31 by Tyler